


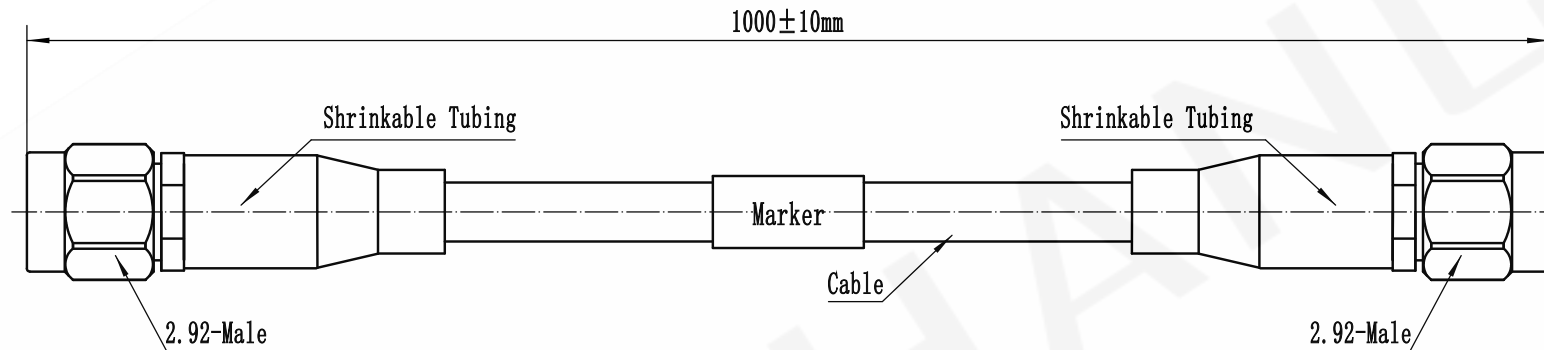

ELECTRICAL SPECIFICATIONS:

1. Impedance: 50Ω ;
2. Frequency: DC~40GHz;
3. VSWR: ≤ 1.35 (max) ;
VSWR: 1.25 (typical) ;
4. Insertion Loss (typical) : 2.52dB;
5. Phase Stability (typical) : $\pm 6^\circ$ @40GHz;
6. Amplitude Stability (typical) : $\pm 0.1\text{dB}$ @40GHz;
7. Velocity of Propagation: 82%;
8. Shielding Effectiveness: $>90\text{dB}$.

NOTE:

1. All dimensions are in mm, all angles are in degrees.

MECHANICAL SPECIFICATIONS:

1. Outer Diameter of Cable: 3.9mm;
2. Installation Bend Radius: 20mm;
3. Repeated Bend Radius: 40mm.

ENVIRONMENTAL SPECIFICATIONS:

1. RoHS & REACH: Compliant;
2. Temperature Range: $-55^\circ\text{C} \sim +165^\circ\text{C}$.

TITLE 2.92mm Male to 2.92mm Male System Interconnect Low-Loss RF Cable Assembly – Use CFS400BH Coax			PART NO.	IFCA292-2.92M2.92M-1M
			DWG. NO.	W25042808
			DATE	---
TOLERANCES UNLESS OTHERWISE SPECIFIED X ± 0.50 .XX ± 0.10 .X ± 0.20 ANGLES $\pm 1^\circ$		SCALE 2:1	VIEW DIRECTION 	
SHEET: 1/1		REV.		
		V1.0	Mechanc (Shanghai) Information Technology Co., Ltd. www.mechanc.com sales@mechanc.com	