


Flange dimensions:

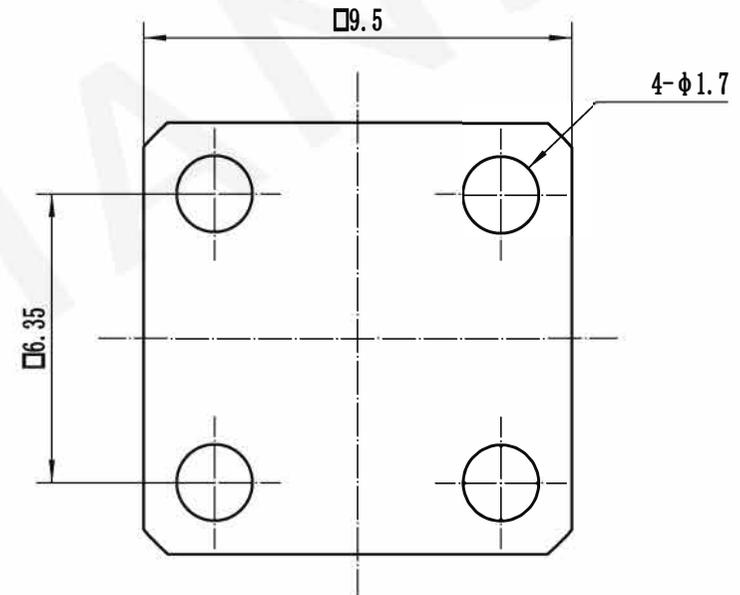

**ELECTRICAL:**

1. Impedance:  $50 \Omega$  ;
2. Frequency: DC~50GHz;
3. VSWR/Return Loss:  $\leq 1.18$ ;
4. Insertion Loss:  $\leq 0.06 \sqrt{\text{dB}}$ ;
5. Insulation Resistance:  $\geq 5000M \Omega$  ;
6. Dielectric Withstanding Voltage(AC): 500 Vrms.

**MATERIAL & PLATING:**

1. Contact: Beryllium Copper, Gold;
2. Insulation: PEI;
3. Outer Conductor: Stainless steel, Passivated.

**ENVIRONMENTAL & MECHANICAL:**

1. Temperature Range:  $-55^{\circ}\text{C} \sim +155^{\circ}\text{C}$ ;
2. RoHS: Compliant.

All dimensions are in mm,  
all angles are in degrees.

TITLE		PART NO.	2.4-JFD9
2.4mm Male Field Replaceable RF Connector - 4 Hole Flange Mount, 6.35mm Hole Spacing, 0.41mm Pin		DWG. NO.	---
		DATE	---
		Mechanc (Shanghai) Information Technology Co., Ltd.	
		www.mechanc.com sales@mechanc.com	
TOLERANCES UNLESS OTHERWISE SPECIFIED	SCALE	VIEW DIRECTION	
X $\pm 0.50$ XX $\pm 0.10$ X $\pm 0.20$ ANGLES $\pm 1^{\circ}$	6:1		
SHEET: 1/1	REV.	V1.0	