


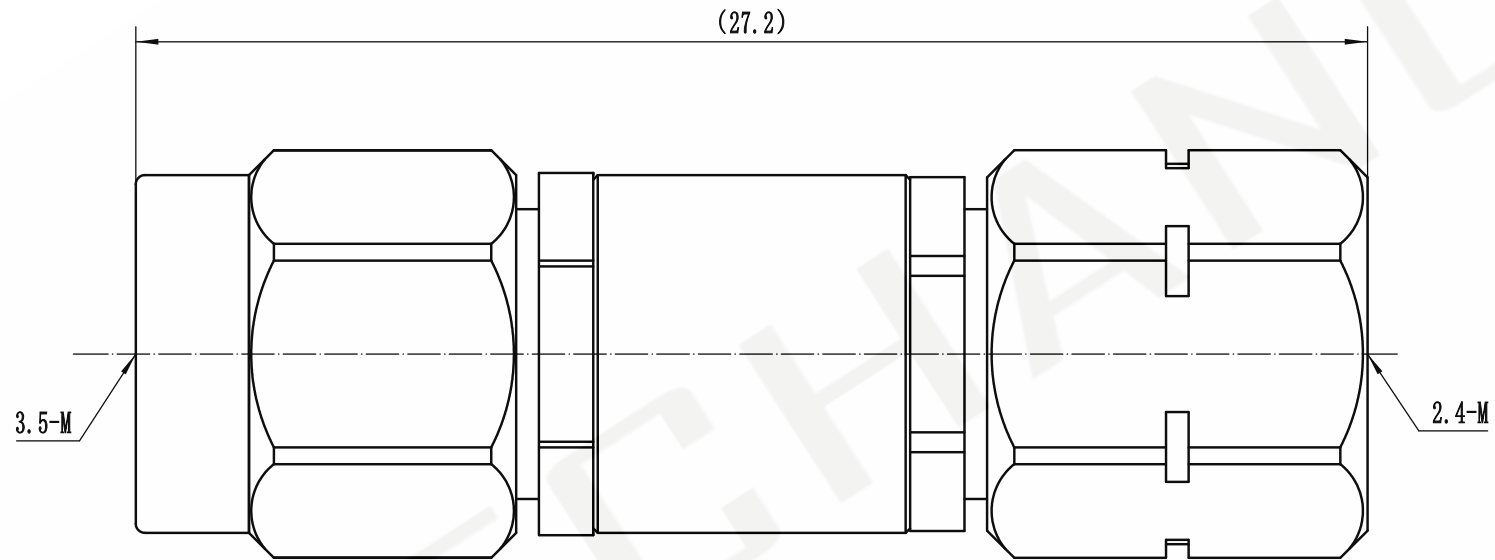

ELECTRICAL:

1. Impedance: $50\ \Omega$;
2. Frequency: DC~26.5GHz;
3. VSWR/Return Loss: ≤ 1.12 ;
4. Insertion Loss: $\leq 0.06\ \text{dB}$;
5. Insulation Resistance: $\geq 5000M\ \Omega$;
6. Dielectric Withstanding Voltage(AC): 500 Vrms.

MATERIAL & PLATING:

1. Contact: Beryllium Copper, Gold;
2. Insulation: PEI;
3. Outer Conductor: Stainless steel, Passivated.

ENVIRONMENTAL & MECHANICAL:

1. Temperature Range: $-55^{\circ}\text{C} \sim +155^{\circ}\text{C}$;
2. RoHS: Compliant.

All dimensions are in mm,
all angles are in degrees.

TITLE		PART NO.	3.5/2.4-JJ1
3.5mm Male to 2.4mm Male RF Adapter		DWG. NO.	---
		DATE	---
TOLERANCES UNLESS OTHERWISE SPECIFIED		Mechanc (Shanghai) Information Technology Co., Ltd. www.mechanc.com sales@mechanc.com	
X ± 0.50	XX ± 0.10		
X ± 0.20	ANGLES $\pm 1^{\circ}$		
SHEET: 1/1		SCALE	6:1
		VIEW DIRECTION	
		REV.	V1.0