


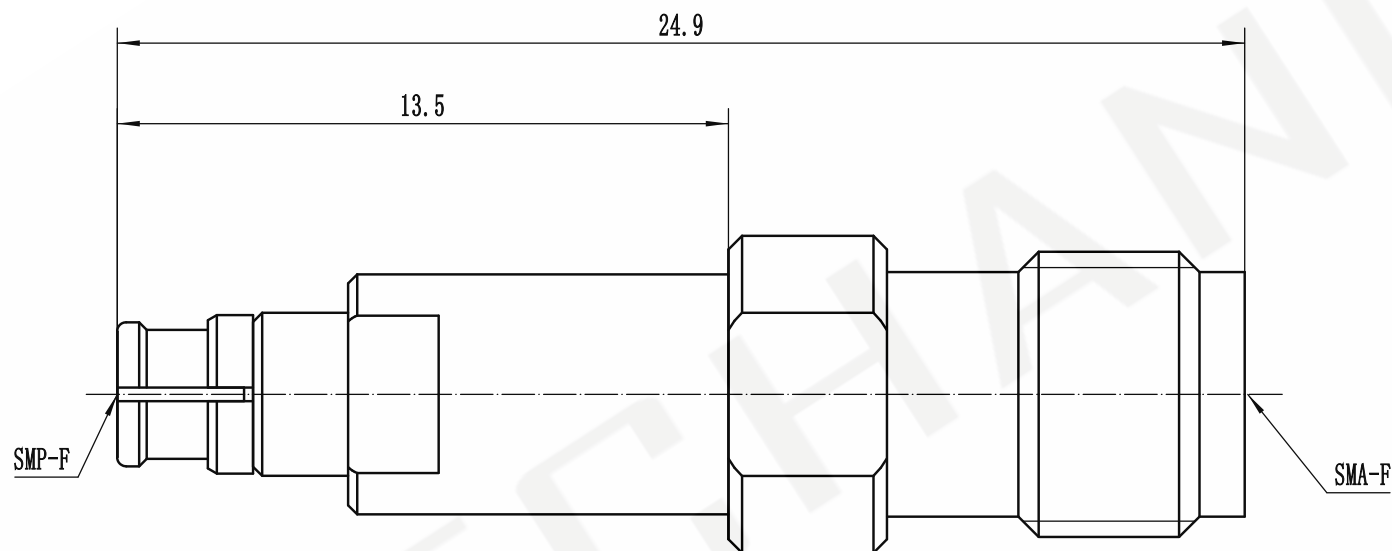

ELECTRICAL:

1. Impedance: 50Ω ;
2. Frequency: DC~26.5GHz;
3. VSWR/Return Loss: ≤ 1.15 ;
4. Insertion Loss: $\leq 0.06 \sqrt{\text{dB}}$;
5. Insulation Resistance: $\geq 5000M \Omega$;
6. Dielectric Withstanding Voltage(AC): 500 Vrms.


ENVIRONMENTAL & MECHANICAL:

1. Temperature Range: $-55^{\circ}\text{C} \sim +155^{\circ}\text{C}$;
2. RoHS: Compliant.

MATERIAL & PLATING:

1. Contact: Beryllium Copper, Gold;
2. Insulation: PTFE;
3. Outer Conductor: Beryllium Copper, Gold; Brass,Gold.

All dimensions are in mm,
all angles are in degrees.

TITLE SMP Female to SMA Female RF Adapter			PART NO.	SMP/SMA-KK1
			DWG. NO.	---
			DATE	---
TOLERANCES UNLESS OTHERWISE SPECIFIED X ±0.50 XX ±0.10 X ±0.20 ANGLES ±1°		SCALE 6:1	Mechanc (Shanghai) Information Technology Co., Ltd. www.mechanc.com sales@mechanc.com	
VIEW DIRECTION 				
SHEET: 1/1		REV.		