


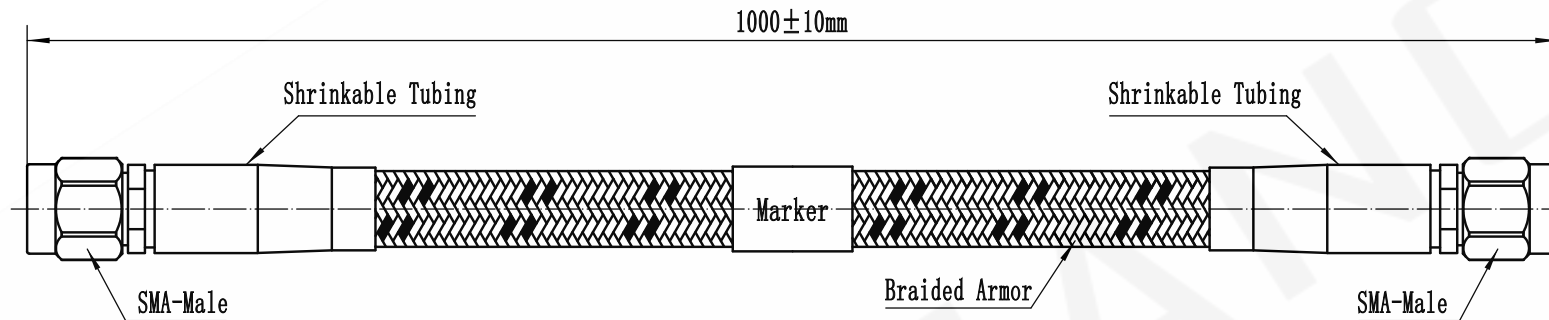

ELECTRICAL SPECIFICATIONS:

1. Impedance: 50Ω ;
2. Frequency: DC~6GHz;
3. VSWR: ≤ 1.15 (max) ;
VSWR: 1.1 (typical) ;
4. Insertion Loss (typical) : 1.23dB;
5. Phase Stability (typical) : $\pm 2.5^\circ$ @6GHz;
6. Amplitude Stability (typical) : ± 0.03 dB@6GHz;
7. Velocity of Propagation: 74%;
8. Shielding Effectiveness: >100dB.

NOTE:

1. All dimensions are in mm, all angles are in degrees.

MECHANICAL SPECIFICATIONS:

1. Bending Life of Cable (typical) : 15000;
2. Crush Resistance: 45 kgf/cm;
3. Outer Diameter of Braided Armor: 6.1mm;
4. Repeated Bend Radius: 61mm.

ENVIRONMENTAL SPECIFICATIONS:

1. RoHS & REACH: Compliant;
2. Temperature Range: $-55^\circ\text{C} \sim +125^\circ\text{C}$.

TITLE SMA Male to SMA Male Phase Stable Precision Test RF Cable Assembly – Use CFT360P6 Coax			PART NO.	PCCS-AP-SMSM-1M
			DWG. NO.	W25042921
			DATE	---
TOLERANCES UNLESS OTHERWISE SPECIFIED X ± 0.50 .XX ± 0.10 .X ± 0.20 ANGLES $\pm 1^\circ$		SCALE 1.5:1	VIEW DIRECTION 	
SHEET: 1/1		REV.		
		V1.0	Mechanc (Shanghai) Information Technology Co., Ltd. www.mechanc.com sales@mechanc.com	