
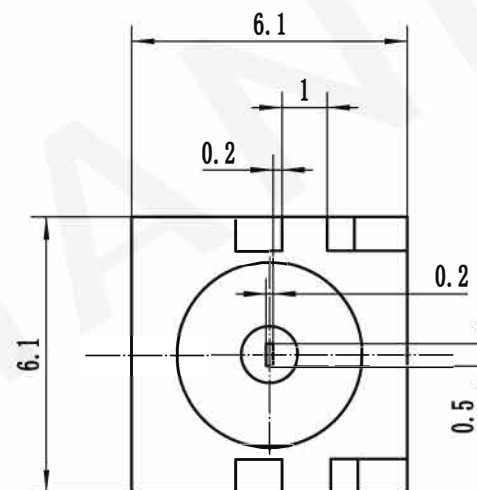


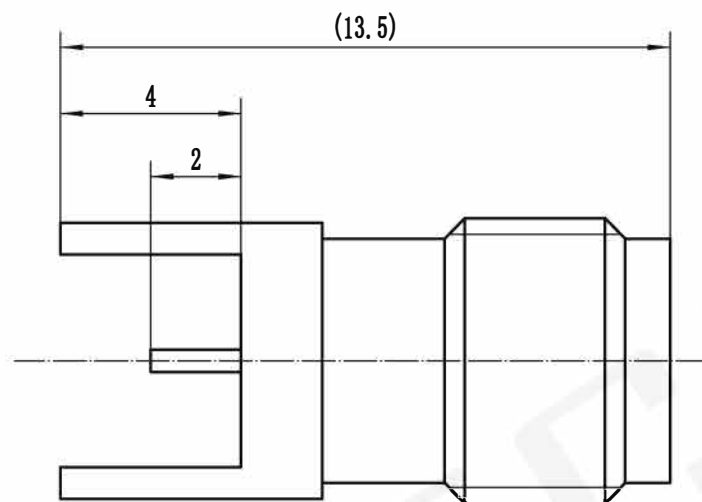

ELECTRICAL:

1. Impedance: $50\ \Omega$;
2. Frequency: DC~18GHz;
3. VSWR/Return Loss: ≤ 1.08 ;
4. Insertion Loss: $\leq 0.06\ \text{dB}$;
5. Insulation Resistance: $\geq 5000M\ \Omega$;
6. Dielectric Withstanding Voltage(AC): 500 Vrms.

MATERIAL & PLATING:

1. Contact: Beryllium Copper, Gold;
2. Insulation: PTFE;
3. Outer Conductor: Brass, Gold.

ENVIRONMENTAL & MECHANICAL:

1. Temperature Range: $-55^{\circ}\text{C} \sim +155^{\circ}\text{C}$;
2. RoHS: Compliant.

All dimensions are in mm,
all angles are in degrees.

TITLE			PART NO.	SMA-KHD1
SMA Female PCB RF Connector - Solder Attachment, Thru-Hole Termination			DWG. NO.	---
			DATE	---
TOLERANCES UNLESS OTHERWISE SPECIFIED			Mechanc (Shanghai) Information Technology Co., Ltd. www.mechanc.com sales@mechanc.com	
X	±0.50	XX ±0.10		
X	±0.20	ANGLES ±1°		
SCALE		VIEW DIRECTION		
6:1				
SHEET: 1/1		REV.	V1.0	